



Orthodontics

Bracket	154
Cutter	157
Orthodontic Pliers	162
Wire Cutter	172
Ligature Instrument	173
Bonding Instrument	176
Orthodontic Articulator	177
Measuring Device	178
Torch	180
Locking Tweezers / Chin Cap	181
Impression Tray	182



















Aesthetics

1) Excellent Toughness and Flexibility

Great material reduces fracture.







2) Low Profile



Zirconia Ceramic provides low profile, compact shape, which reduces occlusal interference.


Comparing to Composite and Alumina 21 12 L12R/L 1 U1R Lower!! Same!!


3) Shoulder System





At initial stage, it provides speedy treatment, and middle and late stage, it provides positive torque control.





4) Bonding Base

Suitable for any kind of adhesion bond.

Light Cure OK

Chemical Cure OK

Central Base



Maximum retentive force exercises in the central undercut part.

Outside Base



Outside base designed into shallow undercut for smooth debonding.


5) Safety Debonding



debonding instrument on mesial / distal corners of base provide smooth and safe debonding without breakage of bracket.

Approach points for

Smooth Debonding



6) Aesthetics

Similar to natural teeth.

Color








Zirconia Ceramic Bracket COBY

-Straight .018" slot-



-Wire Selection for .018" slot.-

[.018" x .025" Slots]

Low friction

Round wire .012" / .014" / .016" / .018"

Rect. wire .016" x .016"

Torque control Rect. wire .016" x .022"

.017" x .025"

.018" x .025"

	Code No.	Description	Tooth	
	27880	STR-018-3-3	3+3 3+3	
1 Case kit	27881	STR-018-3-3H ※	3+3	
i Case kii	27884	STR-018-5-5	<u>5 5</u>	
	27885	STR-018-5-5H <u>※</u>	5+5	
Only UL3 : Wit	h the hook.			

	27800	STR-U1R-018	_1		12	5
	27801	STR-U1L-018	<u>1</u>		12	5
	27802	STR-U2R-018	_2		8	9
	27803	STR-U2L-018	<u>2</u>		8	9
Upper (10 ea.)	27804	STR-U3R-018	_3		-2	11
. ,	27805	STR-U3L-018	3	0	-2	11
	27806	STR-U3R-018H	_3		-2	11
	27807	STR-U3L-018H	3	0	-2	11
	27808	STR-U45-018	54 45		-7	0
	27811	STR-L12-018	21 12	-	0	0
	27813	STR-L3R-018	3		-11	7
	27814	STR-L3L-018	3		-11	7
Lower (10 ea.)	27815	STR-L3R-018H	3		-11	7
	27816	STR-L3L-018H	[3		-11	7
	27817	STR-L4-018	4 4		-17	0
	27820	STR-L5-018	5 5	•	-22	0

Description

Torq.

Marking

Ang.

-Straight .022" slot-

-Wire Selection for .022" slot.-

[.022" x .028" Slots]

Low friction

Round wire .012" / .014" / .016" / .018" / .020"

Rect. wire .016" x .022"

Torque control Rect. wire .017" x .025"

.018" x .025"

.019" x .025" .021" x .025" .022" x .028"

.022 X.020				
	Code No.	Description	Tooth	
	27882	STR-022-3-3	<u>3+3</u>	
1 Case kit	27883	STR-022-3-3H ※	3+3	
	27886	STR-022-5-5	<u>5+5</u>	
	27887	STR-022-5-5H ※	5+5	

※ Only UL3: With the hook.

	No.	Description	Tooth	Color Marking	Torq.	Ang.
	27840	STR-U1R-022	_1		12	5
	27841	STR-U1L-022	1_		12	5
	27842	STR-U2R-022	2		8	9
	27843	STR-U2L-022	2		8	9
Upper (10 ea.)	27844	STR-U3R-022	3		-2	11
	27845	STR-U3L-022	3		-2	11
	27846	STR-U3R-022H	_3		-2	11
	27847	STR-U3L-022H	<u>3</u>		-2	11
	27848	STR-U45-022	54 45		-7	0
Lower (10 ea.)	27851	STR-L12-022	21 12	-	0	0
	27853	STR-L3R-022	3		-11	7
	27854	STR-L3L-022	3		-11	7
	27855	STR-L3R-022H	3		-11	7
	27856	STR-L3L-022H	3		-11	7
	27857	STR-L4-022	4 4		-17	0
	27860	STR-L5-022	5 5	•	-22	0

-Standard .018" slot-

-Wire Selection for .018" slot.-


[.018" x .025" Slots]

Low friction


Round wire .012" / .014" / .016" / .018"

Rect. wire .016" x .016"

Torque control



	No.	Description	Tooth	Color Marking	Torq.	Ang.
	27870	STD-U1-018	1 1	-	0	0
Upper &	27871	STD-U2-018	2 2	-	0	0
Lower (10 ea.)	27872	STD-345-018	543 345 543 345	-	0	0
	27873	STD-L12-018	21 12	-	0	0
1 Case Kit	27890	STD-018-3-3	3+3 3+3	-	-	-
	27892	STD-018-5-5	5+5 5+5	-	-	-

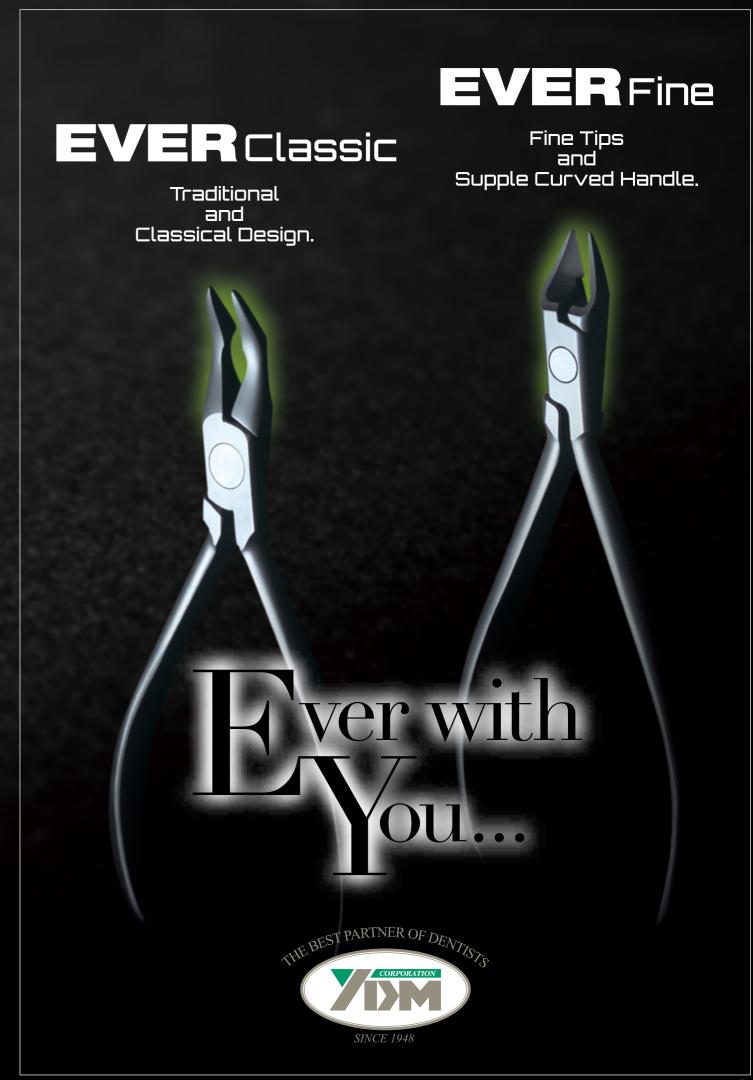



Distal End Cutter **EVER** Fine



- *Cut and hold distal end of arch wire.
- *Cemented carbide inserts provide high performance and long life of the tips.



606S T/C No.27606

*Cut up to •Round wire .012"-.020"

•Rect. wire .016"x.016"-.022"x.028"

606L T/C No.27607

*Cut up to •Round wire .012"-.020"

•Rect. wire .016"x.016"-.022"x.028"

Pin & Ligature Cutter **EVER**





- *Cut excess ligature wire.
- *Hard material inserts ensure cutting of ligature wire and elastic.



Fine

- *To avoid breakage, insert hard material on the tip.
- *Fine curved shape provide performance to cut ligature wire on crowded area, dislocated area easily.



*10° angle and fine curve allow easy to access both premolars and molars.






Pin & Ligature Cutter **EVER** Fine







*Hard material inserts ensure cutting of ligature wire and elastic.







































□L⊒SSI□ Traditional and classical design fascinate artistic mind.

Supple curved handle narrow box joint fascinate new generations.

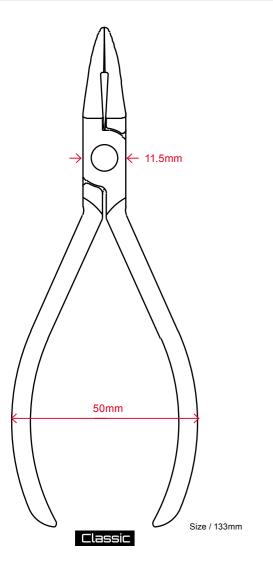

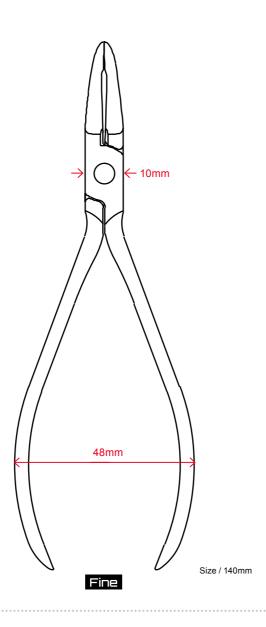

-Utility Pliers-



*Insert, remove the main wire. *Bend ligature wire, UA.


-Utility Pliers-



*Insert, remove the main wire. *Multi purposes for tying ligature etc.

*Tips Pictures of 422 / 440 / 462.



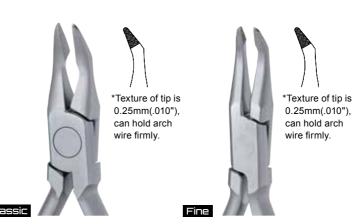

421 Weingart No.27421

Weingart No.27441


*Insert, remove the main wire. *Multi purposes for tying ligature etc.



*Comfortable Long handle with precise tip for both Lingual and Labial treatment.





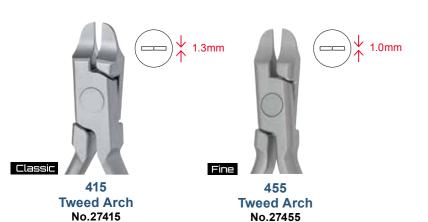

*Maximum wire capacity .022"x.028"

*Hold arch wire, apply torq, offsetbend, inset-bend.



Three Jaw No.27417



*Maximum wire capacity .036"

*Maximum wire capacity .040"

4.5mm in diameter)

*Bend retainer wire, adjust inner bow

with three steps. (1.4mm, 3.0mm,

*Quad Helix, lingual arch, activate of main wire.



Bird Beak No.27418



No.27458

*Maximum wire capacity .036"

*Bend retainer wire, clasp.



414 Young No.27414



Young No.27454




No.27416



Tweed Loop Forming No.27456

*Maximum wire capacity .022"x.028"

*Round beak is shaped 3 layers of cylinders (1.25mm, 1.85mm, 2.26mm in diameter) can be used for closing helical loop, helical loop, omega loop.



*Matte surface can avoid reflection of pliers under bright light.

-Bending Pliers-



Nance Closing Loop No.27419



Nance Closing Loop No.27459

*Maximum wire capacity .022"

* With using each step (3.5mm,4.5mm,5.5mm,6.5mm), make the same height in parallel for loops such as MEAW or Keyhole.



423 Kim T/C (with Cutter) No.27423




453 Kim T/C (with Cutter) No.27453

*Maximum wire capacity .016"x.022"

*Cut up to .020"

*Bend MEAW loop.




452 Light Wire T/C (with Cutter) Light Wire T/C (with Cutter) No.27424 No.27452

*Maximum wire capacity .020" *Cut up to .020"

*Designed for circle hook, tear drop.



426 **Lingual Hollow Chop** No.27426



*"Utility" Hollow Chop Pliers are not only for Lingual but also Labial treatment.

[Lingual Hollow Chop]





*Excellent performance not only for mushroom arch with posterior teeth of lingual wire but also for the narrow curve with β-Ti type material of lingual straight.





delicate bending.





*Comparision with conventional product.





YDM (461)

Conventional Type






*Apply the torque to arch wire with this combination of #27427 and #27428.

*15° and 30° lines for "M" and "F" make your bending smooth and easier.





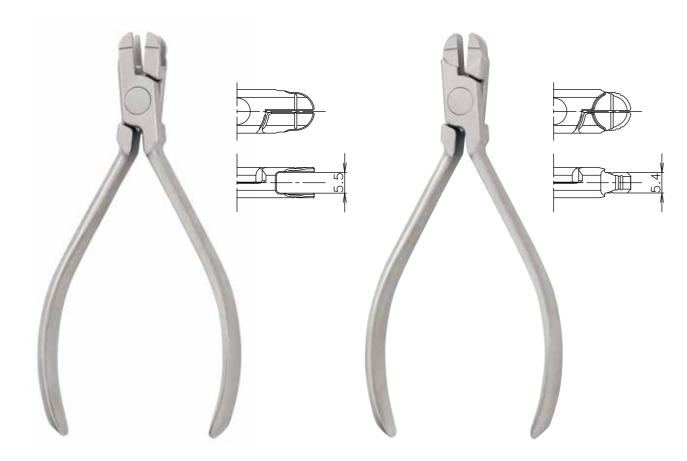

428 Torquing F No.27428 Classic

1) Hold wire by Female plier. * On the cross(+) point.

2) Insert the Male plier. *Both pliers middle line should be straight





427 Torquing M No.27427 Classic


3) Hold like picture and check 2 lines for 15° & 30°





-Bending Pliers-

*YDM unique and efficient design of "Step" and "Cinch Back" Pliers.

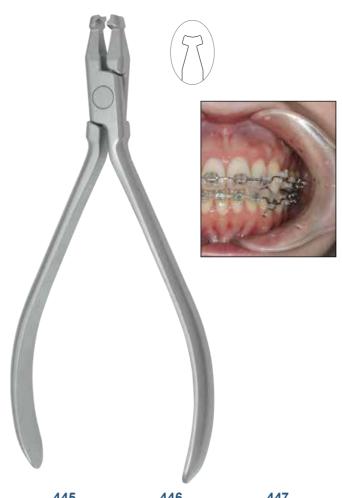


445 Step 1/2mm No.27445 Fine

Step 3/4mm No.27446 Fine


447 **Step 1mm** No.27447







461 Cinch Back No.27461 Fine

*Maximum wire capacity / Round Wire .020" Rect Wire .016"x.016"













*Stylish hammer head for bending both "up and down with beautiful angle". *Up to .020 for easy and smart bending just by this one pliers.





-Aligner Pliers-

- *With fine tips to ensure to insert into lingual or narrow part,crowded teeth.
- *With long handle to ensure to insert into lingual or narrow part,crowded teeth.
- *Matte surface can avoid reflection of pliers under bright light.
- *Supple curved handle fits female dentists.



448 **Tear Drop** No.27448



449 Vertical No.27449



450 Horizontal No.27450



451 **Hole Punch** No.27451







*For making a slit to apply elastic with aligner. Excellently sharp cutting so it doesn't make rough surface, which avoid cutting of elastic.









*For making a vertical hollow to apply torque to mesial or distal part of lingual or buccal side of aligner. Thin and slim shape of tip is designed for easy approach even to narrow incisal margin part, espetially lower anterior.







*For making a horizontal hollow to apply rotation to lingual or buccal side of aligner. Thin and slim shape of tip is designed for easy approach even to narrow incisal margin part, especially lower anterior.



*For making a hole to apply lingual button with aligner. Excellently sharp cutting so it doesn't make rough surface after making a hole. Slim shape of tip is designed for easy approach to the narrow space such as molar part which has low height.



465 **Key Punch** No.27465

No.27463







Round Former 2.0 SM

No.27464

*For making "2.0mm" circle hollow to narrow part of aligner such as lower anterior to apply rotation or torque. Also for making additional hollow to the hollow applied by Vertical or Horizontal pliers for more rotation or









*For removing "attachment" of aligner efficiently.



*For making unique "Key Hole" shape slit to apply elastic with aligner. Excellently sharp cutting without roughness and "Key Hole" shape keeps the elastic inside of slit stable.



Round Former 1.0



*For making 1.0mm circle hollow to narrow part of aligner such as lower anterior to apply rotation or torque. Also for making additional hollow to the hollow applied by Vertical or Horizontal pliers for more rotation or

^{*}Please use bur in case attachment remained a little after using this pliers.







-Banding Pliers-



412 **Band Removing** No.27412



443 Band Removing No.27443



Band Removing L No.27460



*Longer tip than 412,443.

-Banding Pliers-



Band Margin No.27411

-Debonding Pliers-



413 Bracket Removing T/C No.27413



Bracket Removing T/C No.27444

-Crimping Pliers-




425 Crimping No.27425



Convertible Cap Removing Pliers






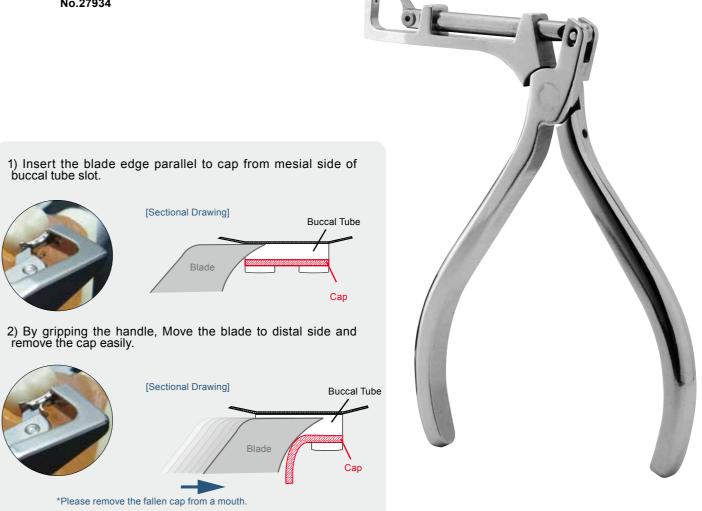

Wire Cutter



*Cut retainer wire, clasp wire.

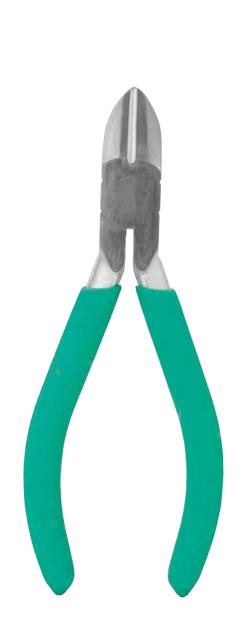

YS-601 No.22601

*Cut up to .032" (ø0.80mm)



YS-602 KI No.22602

*Cut up to .045" (ø1.10mm)



YS-603 Standard No.22603

*Cut up to .048" (ø1.20mm)


Tying Pliers



*Tie ligature wire on the bracket.



YS-506 No.22506 *Steiner Type.




[Clinical Movie]

YS-507 No.22507 *Coon Type.





Ligature Director

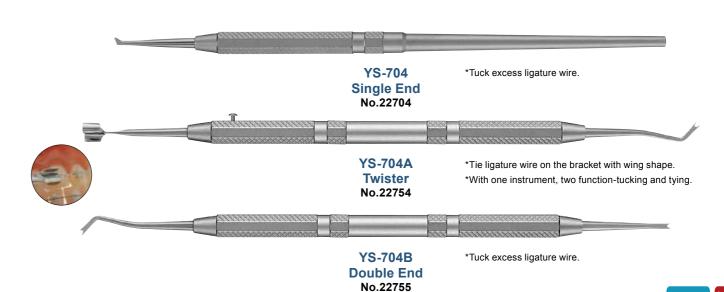

Arch Wire Director



No.27709





Pliers Stand



*Convenient pliers stand made by high-class stainless steel for steriliation and storage of pliers / cutters.

^{*&}quot;S" and "L" size are abailable.



No.	Description	Size (mm)			
	Description	а	b	С	
27400	Pliers Stand S	112	64	80	
27401	Pliers Stand L	154	124	140	



Band Seater



*Set band by patient's own occlusal force.

*Tip can be replaced.



YS-703 No.22703

Band Pusher



*Insert band.






YS-701 No.22753

Surplus Cement Remover



*Remove surplus bonding material smoothly.

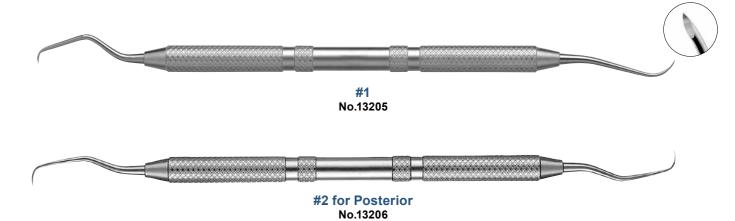



Bracket Tweezers



- *Hold firmly the bracket by groove at the tips.
- *At the end of the handle with measure (3.5mm, 4.0mm, 4.5mm, 5.0mm) helps bracket height and angulation.

No.22761



Multi Use Tweezers Fine




- *"Multi" use for handling bracket, tube, lingual button and so on.
- *Firm and stable hold without dropping off even used for tube thanks to its "exquisite" tip design.
- *Designed slim tip not to get stuck with the space of hook part of tube.

No.27409



[Handling bracket]









*Designed angle for clear view.



*Bonding tube on second molar. Designed tip angle not to contact retractor.





Articulator

-for Construction Bite-



YS-714 No.22714

Typodont Articulator







*Product does not include wax form and teeth.

-Example of Practicing with the Typodont Practice Model-



1) Attach the ORT various Wax Form to the Typodont Ocluder by applying molten wax with an instrument.



2) Remove the jaws with the black base as pictured.



3) Dip the jaws into 55-60°C



4) Lift the jaws from the warm water and dip into cool water. Observe the result.




Model Measuring Device



Contents Main body, Chart (25 sheets)

YS-34 with Chart No.22934

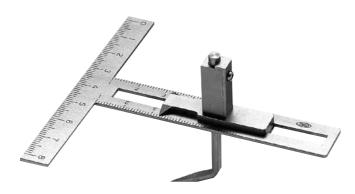


- *This measuring device is for the purpose of measuring following length/ Width below on a tooth model, constituting T shape ruler and (vertical, horizontal) indicator needle. The indicator needle designed to slide on its vertical surface.
- *This measuring device is designed to measure following (1),(2),(3).

 For the measurement of (4) please use separately sold Orthodontic Caliper as the direction mentioned below.
- (1) Length of dental arch
- (2) Width of dental arch
- (3) Length of BASAL ARCH
- (4) Width of BASAL ARCH

[Direction of how to use]

- A.Horizontal part
- B.Vertical part
- C.Indicator needle



Standard deviation table for width of dental crown, dental arch, BASAL ARCH is also available.


- 1) Width of dental arch With horizontal part A measure its distance between buccal sides of first premolar tooth.
- 2) Length of dental arch
 Fitting in its base line of horizontal part A to the point of first molar teeth in distal part. Then measure the distance
 to incisal edge of a central incisor with vertical part B.
- 3) Length of BASAL ARCH
 Setting horizontal part A as above picture indicates, slide the indicator needle C to fit in the bottom point of the root of a central incisor tooth.
- 4) Width of BASAL ARCH
 Measure the bottom point of the root of first premolar tooth with Orthodontic Calipers.

Tension Gauge

Not V Autoclavable


*Measure the force of coil spring and elastic.



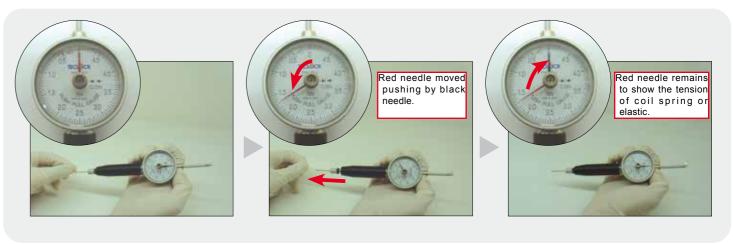

Orthodontic Calipers



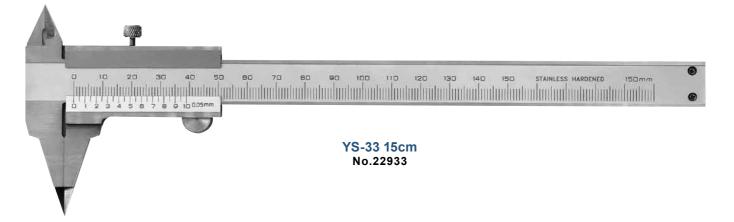





Boone Gauge

- *Check position of bracket on tooth.
- *Measure bracket height 4.5mm, 4.0mm and 3.5mm.



Handy Torch

- *Sharp flame is suitable for delicate work.
- *Gas is empty at the time of delivery.





- *Weight / 245g (with the screen board)
- *Gas Volume / 15g
- *Combustion Time / 80min.
- *Flame Temperature / 1300°C (blue flame)





wax on the nozzle when used lying down on the table.

Scraper



YS-706 No.22706

Locking Tweezers





YS-708L No.22708

Chin Cap




No.22868

Tracing Plate

Maxillary Traction No.22869

YS-40 No.22940



Size / W210xD130mm





Color Tray

-Premium-

*Aluminium

- *Color coated for easy identification.
- *By an edge with height, the impression of a frenum or buccal mucous membrane can be taken firmly.
- *Easily bendable for a custom fit.
- *Impression materials stick to alminium well because of features of alminium itself, also they are difficult to be removed when in fitting.



